


5.8 DUPLEXER

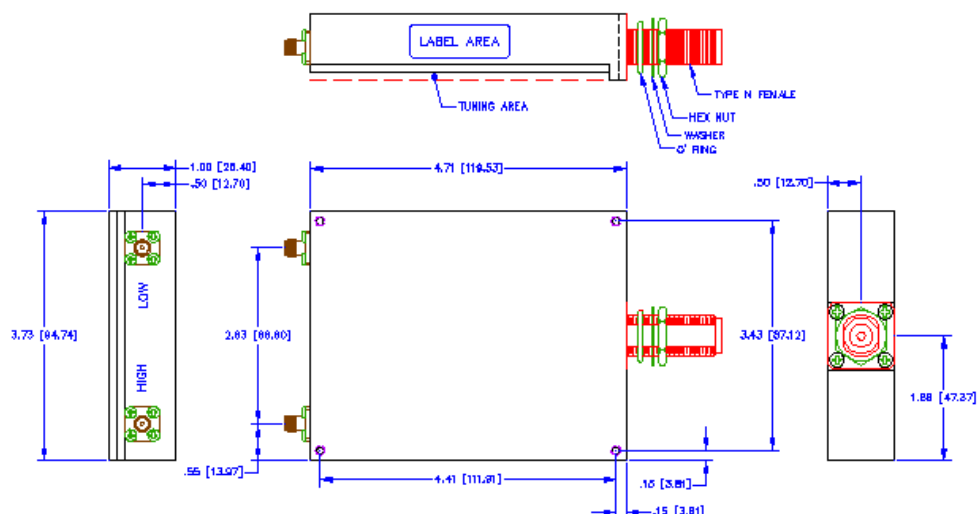

| PARAMETER | SPECIFICATION |
|------------------------|--|
| RECEIVE PASSBAND: | 5725 – 5765 MHz |
| TRANSMIT PASSBAND: | 5810 – 5850 MHz |
| INSERTION LOSS: | 2.0 dB max. |
| RETURN LOSS: | 18.0 dB min. |
| REJECTION: | |
| RECEIVE 5810-5850 MHz | 70 dB min. |
| TRANSMIT 5725-5765 MHz | 70 dB min. |
| ISOLATION TX/RX | 70 dB min. |
| OPERATING TEMPERATURE | -20° to +70°C |
| STORAGE TEMPERATURE | -20° to +85°C |
| CONNECTORS | SMA FEMALE |
| FINISH | PAINTED or PLATED |
| DIMENSIONS (L x W x H) | 4.71" x 3.73" x 1.0" |
| DESIGN OPTIONS | <ul style="list-style-type: none"> ➤ All TechPlus Microwave products can be designed to mount in any configuration you require. ➤ All products can be designed for outdoor use (Weather sealed). |