


Double Band Reject Filter (2 Filters in one enclosure)



PARAMETER	SPECIFICATION
PASSBAND	800 – 900 MHz
PASSBAND	925 – 945 MHz
INSERTION LOSS	0.8 dB max.
RETURN LOSS	18.0 dB min.
REJECTION, 910 – 915 MHz	60 dB min.
POWER	3kW
OPERATING TEMPERATURE	-30° to +60°C
CONNECTORS	7/16 Female
FINISH	Black Paint
DIMENSIONS (L x W x H)	17.1" x 8.65" x 3.92"
DESIGN OPTIONS	<ul style="list-style-type: none">➤ All TechPlus Microwave products can be designed to mount in any configuration you require.➤ All products can be designed for outdoor use (Weather sealed).

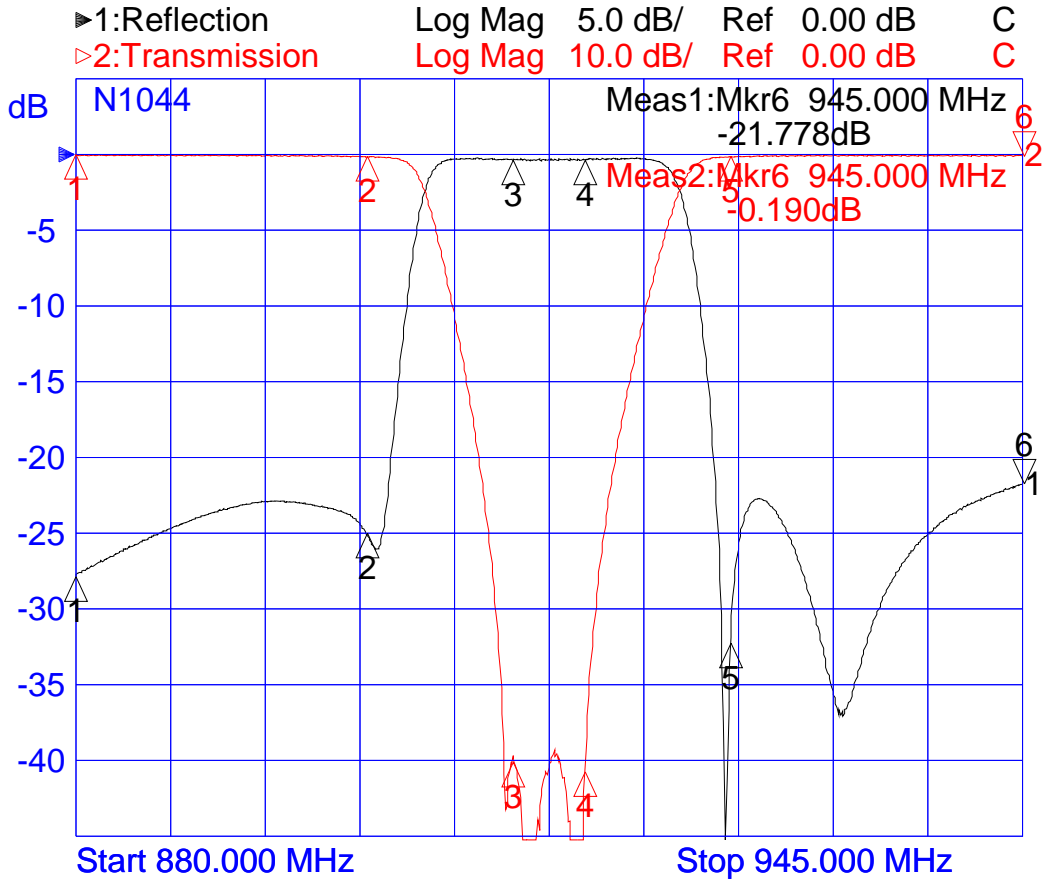

1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1: 880.0000	-27.862	1: 880.0000	-0.104
2: 900.0000	-25.039	2: 900.0000	-0.339
3: 910.0000	-0.330	3: 910.0000	-80.328
4: 915.0000	-0.344	4: 915.0000	-81.467
5: 925.0000	-32.224	5: 925.0000	-0.286
6> 945.0000	-21.778	6> 945.0000	-0.190